



## Mark II Dynapatch® EP-2 Series Patching

- **Bifurcated cobalt and gold plated patch contacts**
- **No exposed contacts or latching mechanisms**
- **Dynapatch® lifetime guarantee**
- **Fully modular**
- **Will pass signal up to 2MHZ**
- **Fiber optic high intensity LED interface monitoring available**
- **Audible and visual interface alarming**
- **V.24/V.35/X.21/RS-530/RS-574/G703/V.36 interface options**
- **Test and monitor access to circuits**

## Mark II Dynapatch® EP-2 Series Patching

The need for reliable, flexible, and cost effective patching, monitoring, alarming, and testing of data communications circuits has not diminished with time. The product solution fulfilling this requirement, the "Dynapatch®" is and has been synonymous with outstanding quality for more than two decades. The Dynapatch® products by NSGDatacom have a long standing history of reliability, durability, and ruggedness. Independent laboratory testing confirmed the product's resilience by it being unaffected by more than five thousand patch insertions and extractions.


The Dynapatch® pioneered the normal-through patching technique. Normal-through connections are achieved without the use of any switches, cords or plugs. It provides a continuous connection from the DCE (modem) input to the DTE (computer) input. This connection is accomplished by gold plated springs being in tensional contact with gold plated contact pads on the printed circuit board.

Cross patching is achieved by the insertion of patch cords into the front of the jack, in either the top hole position (DTE/Computer) or middle hole position (DCE/Modem), the normal-through connection is broken and the circuit is connected through the patch cord instead. The bottom patch hole in the jack is for monitoring only, and does not break the normal-through connection.

A non-normal-through patch jack is also available. For this, the gold springs are not used and an insertion of a patch cord into the DCE (modem) opening and into the DTE (computer) opening, using the same jack or other non-normal through jacks in the rack (s).

Several options are available, including basic patching, electrical interface monitoring, audible and visual alarming on circuit events. In addition to these features, Dynetcom patching offers easy datascope access to the electrical interface to allow interactive circuit testing or passive circuit monitoring.

### The Dynapatch® Concept

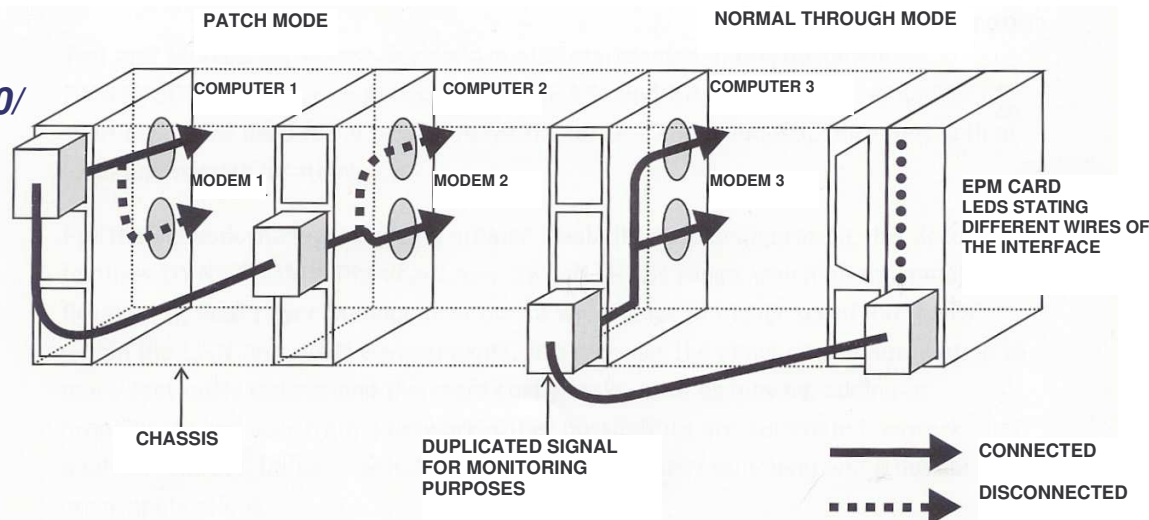

Communication solutions from

# NSGDatacom

extend. evolve. innovate.



## Mark II Dynapatch® EP-2 Series Patching

### Standard

- V.24/RS232(DB25), RS-530(DB25), V.35(M34), RS-574(DB9), G703(BNC), and X.21(DB15) interfaces available
- Patching and test/monitor access
- Multiple interfaces of patch jacks can be mixed in a rack adapter
- Slots for up to 18 patch jacks per rack adapter (slots 17 & 18 can be used for Test and Monitoring modules)
- Patch jacks, Test, and Monitoring modules available in Tan, Black, Red, Green, and Gray
- Rack adapters available in brown, black, red, and green
- Test Access module are available for V.24/RS232, RS530, V.35, X.21 and RS574 interfaces
- Monitoring Access module are available for V.24/RS232, X.21 and RS530 interfaces and is 100-240 VAC
- Pre-Configured PAKs available or parts can be ordered separately

### Economy Enhanced

- V.24 and V.36 interface
- Patching and test/monitor access
- Slots for up to 18 patch jacks per rack adapter (slots 17 & 18 can be used for Test and Monitoring modules)
- 7 LED line power monitors per patch jack.
- Patch jacks, Test, and Monitoring modules available in gray and tan.
- Monitoring module available in 90-120 VAC and 200-240 VAC.
- Pre-Configured PAKs available or parts can be ordered separately

### Enhanced Patch

- V.24/RS232, V.35, and X.21 interface available
- Patching and test/monitor access
- Audible and visible alarming on interface events
- Variable alarm delay with auto reset
- Multiple interfaces of patch jacks can be mixed in a rack adapter
- Slots for up to 16 patch jacks per rack adapter (slot 17 is available for Test and Monitoring modules, slot 18 ships with Monitor/Alarm module installed)
- 7 LED monitors per patch jack
- 85-240 VAC auto ranging brick power supply
- Enclosed chassis with back panel and connector screw locks for mounting cables, allowing removal of patch jack without disturbing interface connection
- Pre-Configured PAKs available or parts can be ordered separately



The Dynetcom Dynapatch® EP-2 Series patch jacks are guaranteed against defects in material and workmanship for the life of the original installation.

# NSGDatacom

[www.nsgdata.com](http://www.nsgdata.com)

3863 Centerview Drive  
Chantilly, VA, 20151-3232 USA  
Phone: +(1) 703 793 2000  
Fax: +(1) 703 793 2001

7435 New Technology Way  
Frederick, MD, 21703 USA  
Phone: +(1) 301 662 5926  
Fax: +(1) 301 694 6279

The Brackens, London Road  
Ascot, Berkshire SL5 8BE, UK  
Phone: +(44) 1344 893 000  
Fax: +(44) 1344 891 990